

HIGH SPEED STEEL THREADED SHANK ADAPTER DRILLS


ICS USA

HEAVY DUTY

135° SPLIT POINT

NAS 965, TYPE B SPECIFICATIONS

1/4 - 28
THREAD

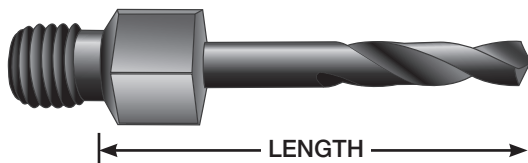

Type "B" HSS Threaded Shank Adapter Drills are used for medium duty drilling in low tensile strength materials in confined areas. They are manufactured with true concentricity for more accurate holes. They are often referred to as Snake Drills.

SIZE	DEC. EQUIV.	ITEM NO.	PRICE
STUB LENGTH 1/2" - 5/8"			
#3	.2130	TSADSM#03	5.26
#5	.2055	TSADSM#05	5.14
#10	.1935	TSADSM#10	4.28
#11	.1910	TSADSM#11	4.30
#12	.1890	TSADSM#12	5.04
#13	.1850	TSADSM#13	4.28
#16	.1770	TSADSM#16	4.22
#19	.1660	TSADSM#19	4.20
#20	.1610	TSADSM#20	4.24
#21	.1590	TSADSM#21	4.24
#27	.1440	TSADSM#27	4.24
#30	.1285	TSADSM#30	4.16
#40	.0980	TSADSM#40	4.00
1/8	.1250	TSADSM008	4.10
5/32	.1562	TSADSM010	4.20
3/16	.1875	TSADSM012	4.94
7/32	.2188	TSADSM014	5.26
1/4	.2500	TSADSM016	4.62
"D"	.2460	TSADSM"D"	4.72
"F"	.2570	TSADSM"F"	4.72
SHORT LENGTH 1-1/4"			
#5	.2055	TSADS#05	5.56
#8	.1990	TSADS#08	5.46
#10	.1935	TSADS#10	4.00
#11	.1910	TSADS#11	4.02
#12	.1890	TSADS#12	5.36
#13	.1850	TSADS#13	3.92
#16	.1770	TSADS#16	3.88
#19	.1660	TSADS#19	4.30
#20	.1610	TSADS#20	3.82
#21	.1590	TSADS#21	3.82
#27	.1440	TSADS#27	3.72
#30	.1285	TSADS#30	3.72
#40	.0980	TSADS#40	3.62
3/32	.0938	TSADS006	5.14
7/64	.1094	TSADS007	4.10
1/8	.1250	TSADS008	3.68
9/64	.1406	TSADS009	4.20
5/32	.1562	TSADS010	4.10
11/64	.1719	TSADS011	4.72
3/16	.1875	TSADS012	4.20
7/32	.2188	TSADS014	5.68
1/4	.2500	TSADS016	4.30
5/16	.3125	TSADS020	10.50
"D"	.2460	TSADS"D"	4.72
"F"	.2570	TSADS"F"	4.72

SIZE	DEC. EQUIV.	ITEM NO.	PRICE
LONG LENGTH 2-1/8"			
#3	.2130	TSADL#03	6.10
#5	.2055	TSADL#05	6.10
#8	.1990	TSADL#08	5.98
#10	.1935	TSADL#10	4.58
#11	.1910	TSADL#11	4.56
#12	.1890	TSADL#12	5.46
#13	.1850	TSADL#13	4.50
#16	.1770	TSADL#16	4.54
#19	.1660	TSADL#19	4.84
#20	.1610	TSADL#20	4.36
#21	.1590	TSADL#21	4.36
#27	.1440	TSADL#27	4.26
#30	.1285	TSADL#30	4.30
#40	.0980	TSADL#40	4.20
3/32	.0938	TSADL006	5.46
7/64	.1094	TSADL007	4.20
1/8	.1250	TSADL008	4.22
9/64	.1406	TSADL009	4.52
5/32	.1562	TSADL010	4.42
11/64	.1719	TSADL011	4.94
3/16	.1875	TSADL012	4.20
7/32	.2188	TSADL014	6.20
1/4	.2500	TSADL016	4.84
5/16	.3125	TSADL020	10.50
"D"	.2460	TSADL"D"	5.04
"F"	.2570	TSADL"F"	5.04
EXTRA LONG LENGTH 3"			
#13	.1850	TSADXL#13	8.46
#20	.1610	TSADXL#20	7.10
#30	.1285	TSADXL#30	6.52
3/32	.0938	TSADXL006	7.38
5/32	.1562	TSADXL010	7.76
3/16	.1875	TSADXL012	8.20
5/16	.3125	TSADXL020	16.92
"F"	.2570	TSADXL"F"	9.46

NOTE: Different sizes, lengths and thread sizes are available. Inquire for pricing.