

# CHUCK KEYS



ICS USA

SPECIAL PURPOSE

COLD ROLLED STEEL

ICS Chuck Keys fit virtually all power drills on the market. How-to-choose chart on each package aids in selection of correct key. Packaging is designed to let customer check size for correct fit. All Chuck Keys are engineered to fit Jacobs and Supreme Key operated chucks. Cold rolled steel chuck keys are heat treated for durability and plated to resist corrosion.

## CHUCK KEYS (T-HANDLE)

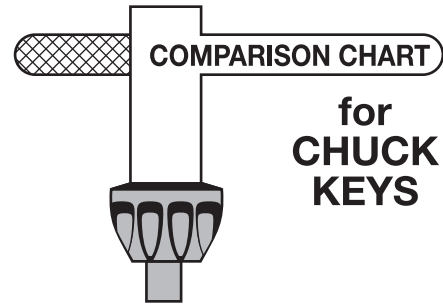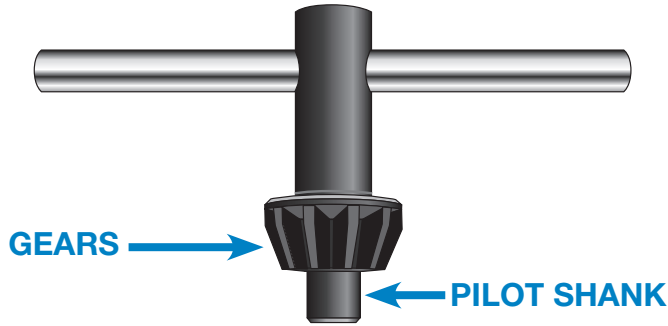

CHUCK SIZE	GEARS	PILOT SHANK	ITEM NO.	PRICE EACH
5/32	11	1/8	CK-TK0	3.54
1/4	11	5/32	CK-TK1	2.42
1/4-3/8	11	1/4	CK-TKG	2.52
3/8	11	1/4	CK-TK2	3.54
3/8	11	7/32	CK-TK7	4.12
1/2	10	1/4	CK-TK32	5.78
1/2	10	11/32	CK-TKR	11.56
1/2-5/8	11	5/16	CK-TK3	7.44
3/8	10	15/64	CK-TK30	4.02
3/8-1/2	10	9/32	CK-TKK	3.54
1/4	11	13/64	CK-TK13	2.52
3/4	12	3/8	CK-TK4	15.74
3/8-1/2	10	9/32	CK-TKKB	2.74

ICS KEY	JACOBS KEY	SUPREME KEY	B & D KEY	MILLER FALLS KEY
CK-TK0	K0	0		
CK-TK1	K1	D1	U-1507	MK1
CK-TKG	KG	DB1	U-1529	MK2
CK-TK2	K2	2		2MK3
CK-TK7	K7	D4		MK3
CK-TK32	K32	D5	U-1508	3MK1
CK-TKR	KR	DB5		3MK1A
CK-TK3	K3	D6		3MK2
CK-TK30	K30	D13	U-1524	2MK1
CK-TKK	KK	DB13	U-1533	2MK2
CK-TK13			70-110	
CK-TK4	K4	9		MK4
CK-TKKB	KK	DB13	U-1533	2MK2

**NOTE:** If your drill chuck key is not listed it is because WE DO NOT have a cross reference for every chuck manufactured. The best thing to do is measure the diameter of the pilot hole/shank and match that diameter with the drill chuck size you have. For example, if your pilot is 11/32" and your drill chuck is 1/2", you would need a CK-TKR.