

CARBIDE TIPPED TRI POINT AUGER BITS

ICS WIS

HEAVY DUTY

TRI POINT

1/2" ROUND
SHANK

Carbide Tipped Tri Point Auger Bits are designed for CNC machines to do pre plate drilling of railway cross ties.

SIZE	LENGTH	SHANK	ITEM NO.	PRICE
5/8	12	1/2	CTTPAB040X12	47.50
11/16	12	1/2	CTTPAB044X12	49.00
3/4	12	1/2	CTTPAB048X12	50.96
METRIC				
18mm	12	1/2	CTTPABM18X12	52.00

HIGH SPEED STEEL MORTISE BITS BI-DIRECTIONAL

ICS WIS

SPECIAL PURPOSE

STRAIGHT OR
1/2" SHANKRIGHT OR LEFT
HAND CUTTING


High Speed Steel Bi-Directional Mortise Bits are designed with two flutes for right and left hand cutting. They are used in Rye oscillating mortising machines to produce clean slots by oscillating cutting strokes. They are also known as Reciprocating Slotters, Oscillating Mortise Bits, Mortising Router Bits, Multi-Directional Mortise Cutters or Bird's Mouth Mortising Bits.

CUTTING DIAMETER	CUTTING LENGTH	SHANK DIAMETER	OVERALL LENGTH	ITEM NO.	PRICE
1/4	2	1/4	4	MBBDSS016X200	12.60
5/16	2	5/16	4	MBBDSS020X200	12.60
3/8	2-1/2	3/8	4-1/2	MBBDSS024X232	13.54
7/16	2-1/2	7/16	4-1/2	MBBDSS028X232	16.92
1/2" SHANK					
1/4	1-1/4	1/2	3-1/4	MBBDRS016X116	12.60
1/4	2	1/2	4-1/2	MBBDRS016X200	12.60
5/16	2	1/2	4-1/2	MBBDRS020X200	12.60
3/8	2	1/2	4-1/2	MBBDRS024X200	12.60
1/2	2-1/2	1/2	4-1/2	MBBDRS032X232	12.60

HIGH SPEED STEEL KEYHOLE SLOT ROUTER BIT

ICS WIS

SPECIAL PURPOSE

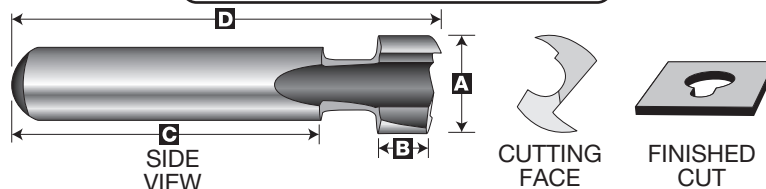

High Speed Steel Keyhole Slot Router Bits are designed to rout a vertical or horizontal keyhole slot for hanging picture frames, shelves, mirrors, plaques, clocks, candle sconces, cabinets, support fixtures, and other wall hangings. They cut a 5/16" or 3/8" entry hole and recessed slot for positive hanging on a headed fastener.

CUTTING DIAMETER "A"	CUTTING LENGTH "B"	SHANK LENGTH "C"	OVERALL LENGTH "D"	SHANK DIAMETER	ITEM NO.	PRICE
5/16	11/64	1	1-3/8	1/8	RB-KHC020	7.88
3/8	13/64	1	1-3/8	1/4	RB-KHC024	10.50