

HIGH SPEED STEEL


COMBINATION HEX/ROUND SHANK BRIDGE REAMERS

ICS WIS

HEAVY DUTY

RIGHT HAND CUT

1-1/4 HEX SHANK ADAPTER



LEFT HAND FLUTE

SLOW SPIRAL


High Speed Steel Combination Hex/Round Shank Bridge Reamers can be used with ANY 1/2" 3 jaw power tool or in portable pneumatic equipment. They are designed for lining up holes in structural steel fabrication, bridgework, ship construction, automotive maintenance, and railroad manufacturing. Short length makes it useful in close quarters. Safety Style 1-1/4" hex shank size requires only one size square drive impact wrench socket to use. All ICS Safety Style Hex Shank Reamers are designed to protect against the danger and loss of falling objects such as a reamer. See OSHA 29CFR Part 1926.759 (falling object protection).

SIZE	DEC. EQUIV.	DIAMETER AT POINT	SHANK		FLUTE LENGTH	OVERALL LENGTH	ITEM NO.	PRICE
			DIAMETER	LENGTH				
7/16	.4375	17/64	1/2	1-1/2	4-3/8	5-7/8	BRHFHXC028	51.16
1/2	.5000	5/16	1/2	1-1/2	5-1/8	6-5/8	BRHFHXC032	53.40
9/16	.5625	3/8	1/2	1-1/2	5-1/8	6-5/8	BRHFHXC036	55.58
5/8	.6250	25/64	1/2	1-1/2	6-1/8	7-5/8	BRHFHXC040	64.04
11/16	.6875	13/32	1/2	1-1/2	7-1/8	8-5/8	BRHFHXC044	76.90
3/4	.7500	15/32	1/2	1-1/2	7-3/8	8-7/8	BRHFHXC048	84.02
13/16	.8125	35/64	1/2	1-1/2	7-3/8	8-7/8	BRHFHXC052	88.72
7/8	.8750	39/64	1/2	1-1/2	7-3/8	8-7/8	BRHFHXC056	100.28
15/16	.9375	43/64	1/2	1-1/2	7-3/8	8-7/8	BRHFHXC060	108.08
1	1.0000	47/64	1/2	1-1/2	7-3/8	8-7/8	BRHFHXC100	116.66
1-1/16	1.0625	13/16	1/2	1-1/2	7-3/8	8-7/8	BRHFHXC104	125.90
1-1/8	1.1250	55/64	1/2	1-1/2	7-3/8	8-7/8	BRHFHXC108	134.24
1-3/16	1.1875	59/64	1/2	1-1/2	7-3/8	8-7/8	BRHFHXC112	144.26
1-1/4	1.2500	63/64	1/2	1-1/2	7-3/8	11-1/2	BRHFHXC116	160.04
1-5/16	1.3125	1-1/16	1/2	1-1/2	7-3/8	11-1/2	BRHFHXC120	168.24
1-3/8	1.3750	1-1/8	1/2	1-1/2	7-3/8	11-1/2	BRHFHXC124	181.26
1-7/16	1.4375	1-3/16	1/2	1-1/2	7-3/8	11-1/2	BRHFHXC128	191.18
1-1/2	1.5000	1-1/4	1/2	1-1/2	7-3/8	11-1/2	BRHFHXC132	220.16
1-9/16	1.5625	1-1/4	1/2	1-1/2	7-3/8	11-1/2	BRHFHXC136	350.92
1-5/8	1.6250	1-1/4	1/2	1-1/2	7-3/8	11-1/2	BRHFHXC140	350.92
1-11/16	1.6875	1-3/8	1/2	1-1/2	7-3/8	11-1/2	BRHFHXC144	368.90
1-3/4	1.7500	1-3/8	1/2	1-1/2	7-3/8	11-1/2	BRHFHXC148	404.76
1-13/16	1.8125	1-7/16	1/2	1-1/2	7-3/8	11-1/2	BRHFHXC152	422.70
1-7/8	1.8750	1-1/2	1/2	1-1/2	7-3/8	11-1/2	BRHFHXC156	440.64
1-15/16	1.9375	1-1/2	1/2	1-1/2	7-3/8	11-1/2	BRHFHXC160	458.62
2	2.0000	1-3/4	1/2	1-1/2	7-3/8	11-1/2	BRHFHXC200	476.58

BRIDGE/CAR REAMER ADAPTER/SOCKET

The ICS Hex Shank Adapter eliminates the need to weld a nut to the back of your car or bridge reamer. The ICS Hex Shank Adapter converts all 1/2" Round Shanks to a standard 1-1/4" Hex Shank for use in pneumatic equipment.

ADAPTER ASSEMBLY LAYOUT

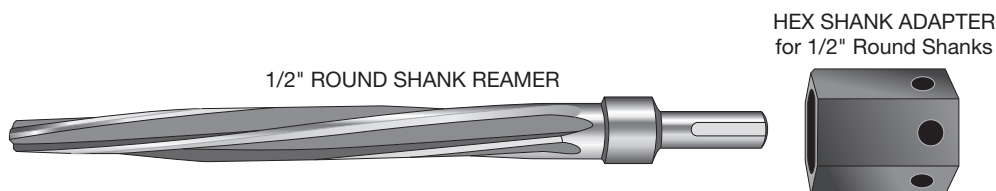

1/2" ROUND SHANK REAMER

HEX SHANK ADAPTER for 1/2" Round Shanks

Three set screws included for non-slip chucking of car reamer

DESCRIPTION	ITEM NO.	PRICE
1-1/4" Hex Shank to 1/2" Round Shank Safety Adapter	HSA116	29.40